

MX4600 – QR CODE

Especificações

Product name	Fixed Mount 2D Barcode Scanner
Item number	RD4500R
Interface	RS232/ USB
Image Sensor	752 x 480CMOS
Symbologies	2D: PDF417, Data Matrix, QR Code 1D: EAN-13, EAN-8, UPC-A, UPC-E, ISSN, ISBN, Codabar, Code 128, Code 93, ITF-6, ITF-14, Interleaved 2 of 5, Industrial 2 of 5, Standard 2 of 5, Matrix 2 of 5, GS1 Databar (RSS-Expand, RSS-Limited, RSS-14), Code 39, Code 11, MSI-Plessey, Plessey
Precision	10 mil
Light Source	White LED
Scan Window	38.3mm*60.4mm
Depth of Field*	40mm-430mm
Print Contrast Signal	≥ 30%
Illumination	0 ~ 100,000 LUX
Power Consumption	1.75W (max)
Power Adaptor	Output: DC5V, 0.5A, Input: AC100~240V, 50~60Hz
Weight	300g
Dimensions	82 mm(L) X 72mm (W) X 52mm(H)
Notification	Beep
Operating Temperature	-10 °C to + 50 °C
Storage Temperature	-20 °C to + 60 °C
Humidity	5% - 95% (non-condensing)
Certification	FCC Part15 Class B, CE EMC Class B

DIGITAL/PRINTED BARCODE DATA CAPTURE
RD4500R is capable of reading 1D and 2D barcodes off mobile phones and printed on paper.




Integrado Truesafe

Design e especificações sujeitos a alteração sem aviso prévio



Maxtel Tecnologia Ltda
CNPJ: 03.174.269/0001-82
Rua Dronsfield, 370
Lapa – 05074-000
São Paulo – SP
(11) 3644-8049
www.maxtel.com.br

Distribuído por:

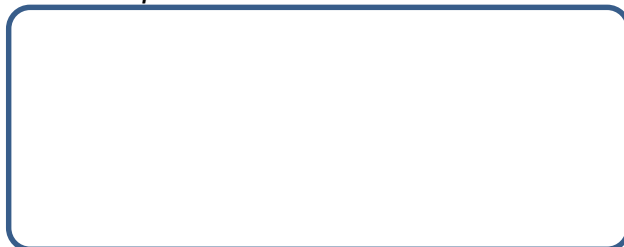

Leitor para Controladora de Acesso

MX4600 – QR CODE

Catraca Slider (vidro)



Catraca Gabinete



Catraca Pedestal



Biometria



Leitores Barras e QR-Code



Cancelas



Fechaduras Magnéticas



Torniquetes

Design e especificações sujeitos a alteração sem aviso prévio

MAXTEL

Maxtel Tecnologia Ltda
CNPJ: 03.174.269/0001-82
Rua Dronsfield, 370
Lapa – 05074-000
São Paulo – SP
(11) 3644-8049
www.maxtel.com.br

Distribuído por:

